

PARTY'S COPY

Plan for Water Supply arrangement including SEMI LI G. & O. H. reservoirs should be submitted at the Office of the Ex-Engineer Water Supply and the sanction obtained before proceeding with the work of Water Supply any deviation may lead to disconnection/demolition.

CONSTRUCTION SITE SHALL BE MAINTAINED TO PREVENT MOSQUITO BREEDING AS REQUIRED UNDER (1) & (2) OF C.M.C. ACT 1980 IN SUCH MANNER SO THAT ALL WATER COLLECTION & PARTICULARLY LIFT WELLS, VENTS, BASINMENT CURBS, SITES, OPEN RECEPTACLES ETC. MUST BE EMPTIED COMPLETELY TWICE A WEEK.

Sanctioned By: *[Signature]*
Assistant Engineer (C-8) Br. No. *[Number]*

Approved By: *[Signature]*
Borough Executive Committee

Before starting any construction the site must conform with the plans sanctioned and all the conditions as proposed in the plan should be fulfilled.
The validity of the written permission to execute the work is subject to the above conditions.

The sanction refers to the proposed portion shown in red and the Executive Engineers makes no admission as to the correctness of the plan.

Design of all Structural Members including that of the foundation should conform to Standards specified in the National Building Code of India.


All Building Materials to necessary & construction should conform to standards specified in the National Building Code of India.

Necessary steps should be taken for the safety of the lives of the adjoining public and private properties during construction.

Non Commencement of Erection/ Re-Erection within Five year will require Fresh Application for Sanction.

A suitable pump has to be provided i.e. pumping unfiltered water for the distribution to the flushing cisterns and urinals in the building incase unfiltered water from street main is not available.

The building materials that will be stacked on Road/Passage or Foot-path beyond 3-months or after construction of G. Floor, whichever is earlier may be seized forthwith by the K.M.C. at the cost and risk of the owner.

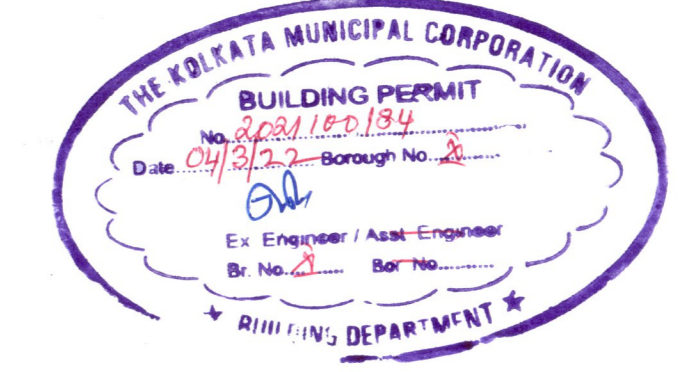

THE SANCTION IS VALID UP TO: 04/02/2017

Any unauthorised construction done in deviation from the Sanction Building permit and the Completion Plans after issuance of this Completion Plans may cause revocation of the Occupancy Certificate.

No rain water pipe should be fixed or discharged on Road or Footpath. Drainage plan should be submitted at the Borough Executive Engineer's Office and the sanction obtained before proceeding with the drainage work.

DEVIATION WOULD BEAR PENALTY

RESIDENTIAL BUILDING

APPROVED ON: 2/2/2017



- 1. Workmen engaged in the work for pollution free environment:
- 2. When construction area/building with concrete, fabric installing dust barrier, or other system, or apparatus for the barrier.
- 3. Apply water or wet materials with a visible damp or created condition for temporary stabilization.
- 4. Apply water or wet materials to leveling or any other earth moving activity to keep the soil moist throughout the project.
- 5. Limit vehicle idling to 10 mins on the work site.
- 6. Clean vehicles and undercarriage of haul trucks prior to leaving construction site.
- 7. Apply pre-mixing dust suppressant on haul roads.
- 8. Apply a cover or screen to discharge and stabilize any dust in completion of activity by water and maintain a dust palladium in all motor vehicles of the site.
- 9. Stabilize surface with water, support equipment and vehicles will operate by using water and maintain surface with a stabilized condition where loaders, support equipment and vehicles will operate.
- 10. Wash or spray down all vehicles following proper activities with immediate landscaping activity or landscaping of the site or full cover.
- 11. Maintain designated dusting/working zone and clean trucks out from paved surfaces at the end of the work site. Trucks out must occur every 50 feet or more and must be cleaned daily, at the discretion.
- 12. Stabilize working surface using soil binders or vegetation or ground cover can effectively stabilize the site.
- 13. Dispose of debris in accordance with the local authorities following proper environmental management practice.
- 14. Existing construction work, including rectification of masonry, ambient noise level should not exceed more than 65 dBA.
- 15. Machinery to be discarded for pollution free environment:
- 16. Don't operate of idling (exhausting).
- 17. Don't allow the vehicle to run at high speed within the work site.
- 18. Don't use machinery without proper dust control/noise control facility.
- 19. Don't keep unattended vehicles cover.
- 20. Don't allow access to the work area except workers to limit soil disturbance and prevent access by people, animals, vegetation, trees or other suitable barrier.
- 21. Don't know the soil, sand and cement stack uncovered.
- 22. Don't keep materials or debris on the road or pavement.
- 23. Storing of all types in hot site plant as a fuel during construction and repair of the roads for material control, should be discarded.

Supervisor
Bldg. Deptt / Br. X
K.M.C.

Building Department
Borough-X
Date: 04/02/2017

THE EXECUTIVE MUNICIPAL CORPORATION

Building Permit
Date: 04/02/2017
Borough-X

APPROVED
ON: 2/2/2017

RESIDENTIAL BUILDING

DEVIATION WOULD BEAR PENALTY