

A suitable pump has to be provided i.e. pumping unfiltred water for the distribution to the flushing cisterns and urinals in the building increase unfiltred water from street main is not available.

The building materials that will be stacked on Road/Passage or Foot-path beyond 3-metres or after construction of G. Floor, whichever is earlier may be seized forthwith by the K.M.C. at the cost and risk of the owner.

Plan for Water Supply arrangement including S.E.M. G. & O. H. reservoir should be submitted at the Office of the Executive Engineer before proceeding with the work or when any deviation may lead to disconnection/demolition.

CONSTRUCTION SITE SHALL BE MAINTAINED TO PREVENT MOSQUITO BREEDING AS REQUIRED U/S 498 (1) & (2) OF CM.C.A.C. TREATY & PARTICULARLY SO THAT ALL WATER COLLECTING & PARTICULARLY LIFT WELLS, VANS, BASKETS, CHANGING SITES, OPEN RECEPTACLES ETC. MUST BE EMPTIED COMPLETELY TWICE A WEEK.

Sanctioned By: *[Signature]*
Assistant Engineer (C-2) Br. No. 3/.....

Approved By: *[Signature]*
The Building Committee 27/1/19

Before starting any construction the site must conform with the plans sanctioned and all the conditions as proposed in the plan should be fulfilled.
The validity of the written permission to execute the work is subject to the above conditions.

The sanction refers to the proposed portion shown in red and the Executive Engineers makes no admission as to the correctness of the plan.

Design of all Structural Members including part of the foundation should conform to Standards specified in the National Building Code of India.


All Building Materials to necessary & construction should conform to standards specified in the National Building Code of India.

Necessary steps should be taken for the safety of the lives of the adjoining public and private properties during construction

Non Commencement of Erection/ Re-Erection within Five Days Require Fresh Application for Sanction

DEVIATION WOULD MEAN DEMOLITION

RESIDENTIAL BUILDING

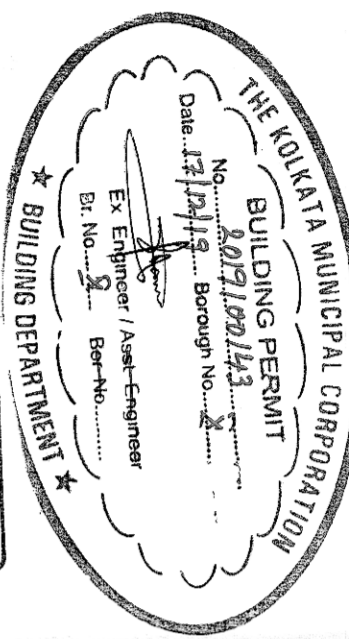

THE SANCTION IS VALUED UP TO..... 12/12/1913.

Sanctioned subject to demolition of existing structure to provide open space as per plan before construction is started

Executive Engineer (C) Br. No. 3/.....


Asst. Engineer (C) Br. No. 3/.....

No rain water pipe should be fixed or discharged on Road or Footpath. Drainage plan should be submitted at the Borough Executive Engineer's Office and the sanction obtained before proceeding with the drainage work.

Any unauthorised construction done in deviation from the Sanctioned Plans and the Completion of the Plans may require revocation of the Occupancy Certificate.

Sanctioned conditionally on an understanding duly registered from the owner's to the effect that they will not evict any tenants & will also provide the tenants with identical area in and around the premises by mutual arrangements.

APPROVED ON 27/1/19

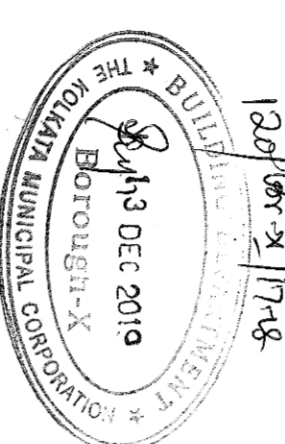

A. The worker's measures need to be taken for pollution free environment:-

- 1) Wear construction handgloves with gloves (rubber) during dust barrier, or other action, as appropriate for the location.
- 2) Apply water spray to a vehicle during or ceased condition for temporary stabilization.
- 3) Apply water prior to spreading or any other earth moving activity to keep the soil moist throughout the project.
- 4) Clean wheels and undercarriage of haul trucks prior to leaving construction site.
- 5) Apply fine misting that suppresses on road dust.
- 6) Apply a cover of screen to the undercarriage of the machines.
- 7) Washdown surfaces with water hoses, support equipment and vehicles will operate by using water and maintain surfaces with a satisfactory condition where hoses, support equipment and vehicles will maintain adjacent disturbed earth activities with immediate landscaping activity or stabilization of vegetative or rock cover.
- 8) Washdown of equipment and vehicles and clean road and from paved surfaces at the end of the work shift.
- 9) Schedule dumping surface along soil banks with vegetation or ground cover as effectively stabilizing mechanism.
- 10) Dispose of debris in consultation with the local authorities following proper environmental management practice.
- 11) Control dust from work, including grading of materials, maintain noise level should not exceed noise limits (dB).
- 12) Fracture to be discarded for pollution free environment.
- 13) Don't dispose of debris indiscriminately.
- 14) Don't cut materials without proper dust control devices being in place.
- 15) Don't allow access in the work area except workers to limit soil disturbance and prevent access by fencing, notices, vegetation, barriers or other suitable barriers.
- 16) Don't leave any materials or debris on the roads or pavement.
- 17) Don't burn any materials or debris on the roads or pavement.
- 18) Burning of old tyres in low risk plant as a fuel during construction and repair of the roads for mobility cost) be should be discarded.

Office of the Executive Engineer, Br. No. 3/..... The Executive Engineer's Office, Building Department, Br. No. 3/..... Dated: 17/1/19