N.B.-PLEASE READ THIS DRAWING IN CONJUNCTION WITH DRAWING NO BMF-1617_P37/MU-02/MU-03

SPECIFICATIONS

1. ALL 230 MM THK BRICKWORK ARE TO BE LAID WITH 1:6 SAND-CEMENT MORTAR WITH A MAXIMUM LIFT OF 1.5M.
2. ALL 125 TO 150 THK BRICKWORKS ARE TO BE DONE WITH 1:4 SAND-CEMENT MORTAR WITH A MAXIMUM LIFT OF 1.5M.
3. PROVIDE DPC MASTIC IN 75 THK BRICKWORK IN EVERY ALTERNATE LAYER AND IN 125 THK BRICKWORK IN EVERY THIRD LAYER.
4. INTERNAL PLASTERWORK TO LIGHT BRICKWORK IS TO ALL R.C.C. WALLS TO BE DONE WITH 1:4 SAND-CEMENT MORTAR.
5. THICKNESS OF PLASTER:
   (i) CEILING - 12MM
   (ii) INTERNAL WALLS - 15 MM ON 230 BRICK
   20 MM ON 125 BRICK
   (iii) EXTERNAL WALLS - 25 MM IN TWO LAYERS
6. ALL BRICK WORK AND PLASTER WORK TO BE CURED BY SPRAYING WATER THRICE A DAY.
7. ALL HOLDFAST FOR DOOR WINDOW FRAME TO BE GROUTED TO BRICKWORK/ CONCRETE IN 1:3:6 CEMENT MIX AND CURED FOR 10 DAYS.
8. CONCRETE TO BE OF M 20 GRADE.
9. ALL REINFORCEMENT SHOULD BE Fe 500
10. COVER TO REINFORCEMENT
    (i) FOUNDATION - 40 mm
    (ii) COLUMN - 40mm TO MAIN BAR
    (iii) BEAM - 25mm TO MAIN BAR
    (iv) SLAB - 15mm
    (v) LENGTH OF BARS SHOULD BE 60 D DIA OF BAR

MASONRY	OPENING
750	2100
900	2100
1200	2100

MASONRY	OPENING	SILL LVL
900	900	1200
1000	1200	900
1000	1500	900
1000	1800	900
2700	2100	750
2700	2400	ABOVE LINTEL

ROLLING SHUTTER
FIXED GLASS

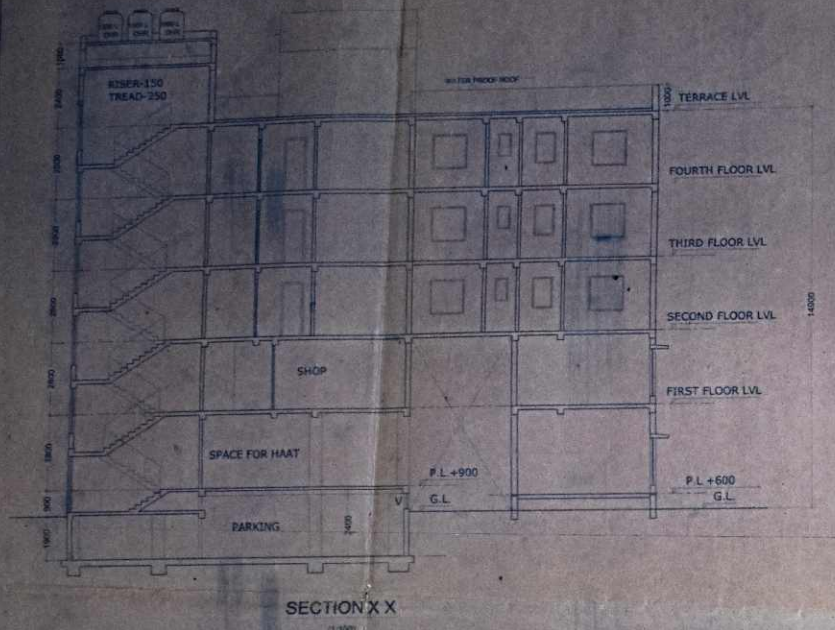

SECTION X X
(1:100)

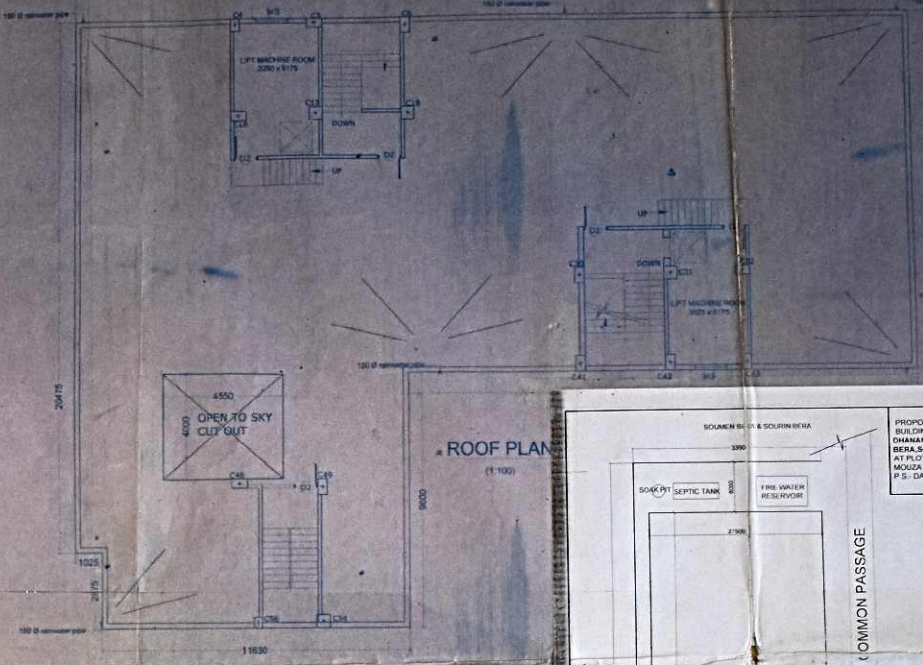

ROOF PLAN
(1:100)

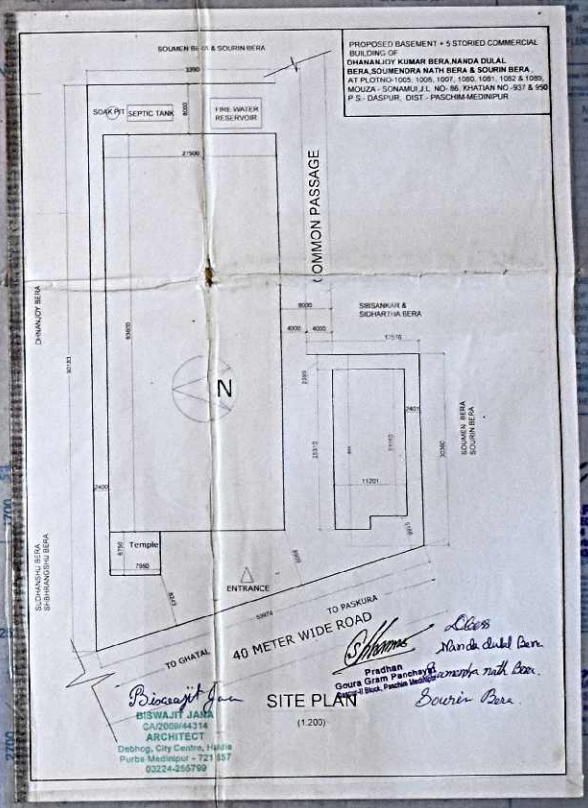

SITE PLAN
(1:200)

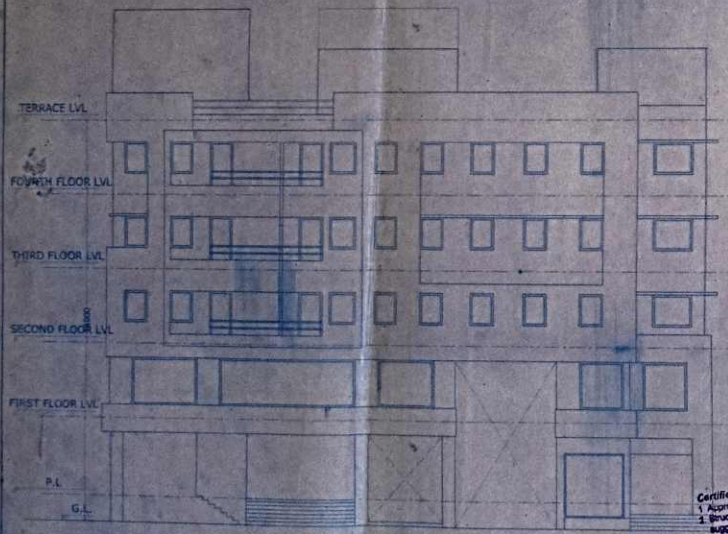

ROAD SIDE ELEVATION
(1:100)

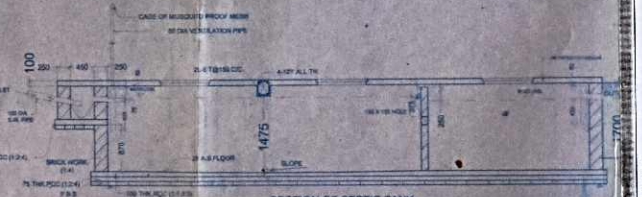

SECTION OF SEPTIC TANK
(1:50)

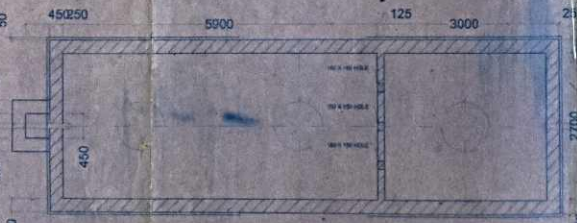

PLAN OF SEPTIC TANK
(1:100)

Certified that the [illegible] Lease.
1. Approved in connection [illegible] it is suggested to have the [illegible] engineer during construction.
2. Structural portion has been designed [illegible] structural engineer during construction.
3. In case of commercial building adequate space to be kept for parking, loading and unloading.
4. Proper drainage arrangement should be provided to prevent any type of ponding and over flow.
5. Adequate fire fighting arrangement should be kept.
6. Lightening arrester to be installed.

District Engineer
Paschim Medinipur Zilla Parishad

Assistant Engineer
P & RD Deptt. GOWB
Paschim Medinipur Zilla Parishad

This project to be completed within 31-12-2019.

Pradhan
Goura Gram Panchayat
Dasgar-II Block

Pradhan
Goura Gram Panchayat
Dasgar-II Block

KEY PLAN

Project completion is extended upto 31-12-2020

Pradhan
Goura Gram Panchayat
Dasgar-II Block

BISWAJIT JANA
CA/2009/44314
ARCHITECT
Debhog, City Centre, Haldia
Purba Medinipur - 721 657
03224-255799

BUILD MASTERS' FORUM