



Preventive measures need to be taken for pollution free environment:-

- a) Wrap construction area/buildings with geotextile fabric installing dust barriers, or other actions, as appropriate for the location.
- b) Apply water and maintain soils in a visible damp or crusted condition for temporary stabilization.
- c) Apply water prior to leveling or any other earth moving activity to keep the soil moist throughout the process.
- d) Limit vehicle speeds to 15 mph on the work site.
- e) Clean wheels and undercarriage of haul trucks prior to leaving construction site.
- f) Apply and maintain dust suppressant on haul routes.
- g) Apply a cover or screen to stockpiles and stabilize stockpiles at completion of activity by water and maintain a dust palliative to all outer surfaces of the stockpiles.
- h) Stabilize surface soils where loaders, support equipment and vehicles will operate by using water and maintain surface soils in a stabilized condition where loaders, support equipment and vehicles will operate.
- i) Stabilize adjacent disturbed soils following paving activities with immediate landscaping activity or installation of vegetative or rock cover.
- j) Maintain dust control during working hours and clean track out from paved surfaces at the end of the work shift/day. Track out must now extend 50 feet or more and must be cleaned daily, at the minimum.
- k) Stabilize sloping surfaces using soil binders until vegetation or ground cover can effectively stabilize the slope.
- l) Disposal of debris in consultation with the local authorities following proper environmental management practice.
- m) During construction work, including cutting of marbles, ambient noise level should not exceed more than 65 dB(A).

Practices to be discarded for pollution free Environment:-

- a) Don't dispose of debris indiscriminately.
- b) Don't allow the vehicles to run at high speed within the work site.
- c) Don't put materials without proper dust control/noise control facility.
- d) Don't keep materials without effective cover.
- e) Don't allow access in the work area except workers to limit soil disturbance and prevent access by fencing, fitches, vegetation, berms or other suitable barrier.
- f) Don't leave the soil, sand and cement stack uncovered.
- g) Don't keep materials or debris on the roads or pavements.
- h) Burning of old tyres in hot mix plant as a fuel during construction and repair of the roads for melting, old tyres should be discarded.

OFFICE OF THE EX-ENGINEER (CIVIL)
BUILDING DEPARTMENT
BOROUGH-VIII
THE KOLKATA MUNICIPAL CORPORATION
104, RASH BEHARI AVENUE
KOLKATA-700 029

KOLKATA MUNICIPAL CORPORATION
BUILDING DEPARTMENTS
CERTIFIED COPY OF B.S. PLAN
No. 201808001R Dt. 12/09/2018
Borough No. VII.....
 12/09/18
Assistant Engineer (c)  12/09/18
Executive Engineer (e)

CERTIFIED COPY

2

Plan for Water Supply arrangement including SEMILI G. & O. H. reservoirs should be submitted at the Office of the Ex-Engineer Water Supply and the sanction obtained before proceeding with the work of Water Supply any deviation may lead to disconnection/demolition.

The building materials that will be stacked on Road/Passage or Foot-path beyond 3-months or after construction of G. Floor, whichever is earlier may be seized forthwith by the K.M.C. at the cost and risk of the owner.

A suitable pump has to be provided i.e. pumping unfiltered water for the distribution to the flushing cisterns and urinals in the building incase unfiltered water from street main is not available.

CONSTRUCTION SITE SHALL BE MAINTAINED TO PREVENT MOSQUITO BREEDING AS REQUIRED U/S 190 (1) & (2) OF CMC ACT 1900. IN SUCH MANNER SO THAT ALL WATER COLLECTION & PARTICULARLY LIFT WELLS, VATS, BASEMENT CURING SITES, OPEN RECEPTACLES ETC. MUST BE EMPTIED COMPLETELY TWICE A WEEK.

No rain water pipe should be fixed or discharged on Road or Footpath. Drainage plan should be submitted at the Borough Executive Engineer's Office and the sanction obtained before proceeding with the drainage work.

All Building Materials to necessary & construction should conform to standards specified in the National Building Code of India.

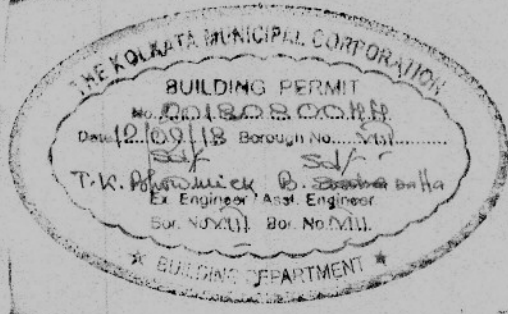
Necessary steps should be taken for the safety of the lives of the adjoining public and private properties during construction.

Non Commencement of Erection/ Re-Erection within Two Year will Require Fresh Application for Sanction.

DEVIATION WOULD MEAN DEMOLITION

THE SANCTION IS VALID UP TO 11/09/2029

Sanctioned subject to demolition of existing structure to provide open space as per plan before construction is started
T.K. Ghoshwami Executive Engineer (C) B. PLAN III
B. Saha Balha Asst. Engineer B. PLAN III



Approved By . MBC Meeting No. 548 Item No. 071/18-19 Dt. 20/06/2018

09/09/18

RESIDENTIAL BUILDING