

GOVERNMENT OF WEST BENGAL
OFFICE OF THE DIRECTOR GENERAL
WEST BENGAL FIRE & EMERGENCY SERVICES
13-D, Mirza Galib Street, Kolkata – 700 016.

Memo. No. : WBFES/ 302

/Bidhan/RB/1475/14 (1475/14) Date : 16/01/15

From : The Director in Charge,
Fire Prevention Wing,
West Bengal Fire & Emergency Services.

To : Mr. Dilip Chowdhury (Director)
Bengal Merlin Housing Ltd.,
22, Prince Anwar Shah Road,
Kolkata-700 033.




Sub : Fire Safety Recommendation for proposed construction of 3Nos. G+XXII, 1No. G+XVIII, 1No. G+XVII storied Under Group Residential Building at premises No.- Mouza-Mahishbathan, Ward No-14, P.S.-Bidhannagar East, Sector-IV, Salt Lake under Bidhannagar Municipality.

This is in reference to your letter No. Nil dated 02.12.2014 regarding Fire Safety measure for proposed construction of 3Nos. G+XXII, 1No. G+XVIII, 1No. G+XVII storied Under Group Residential Building at premises No.- Mouza-Mahishbathan, Ward No-14, P.S.-Bidhannagar East, Sector-IV, Salt Lake under Bidhannagar Municipality.

The plan drawing submitted by you was scrutinized and marked as found necessary from fire safety point of view. In returning one set of plan with recommendation, this office is issuing Fire Safety Recommendation in favour of the aforesaid building subject to the compliance of the following fire safety measure.

Encl. :

1. One set of plan.
2. Recommendation placed in this file.


DIRECTOR IN CHARGE
FIRE PREVENTION WING
WEST BENGAL FIRE & EMERGENCY SERVICES


4. All the staircases of the building shall be negotiable to each other in each floor without entering into any room and shall be extended up to respective terrace. The roof of the stair wall shall be 1M above the surrounding roof area.
5. The width of the staircases and corridors and travel distance of different categories of occupancies shall have to conform the relevant building rules.
6. Fire and Smoke check doors at the entrances of all the Staircase enclosures at each floor level shall be provided. The F.C.D. shall be at least one hour Fire resisting wire glass window fitted with self closing type open able in the direction of escape.
7. Considering the staircases are only means of evacuation, emergency lighting arrangement directional, exit, sign etc. shall be made conforming the relevant I.S. Code in this regards.

D. LIFT:

1. The walls of the lift enclosure of the building shall be at least two hours FIRE resisting type respectively marked in the plan with the event at top of area not less than 0.2m².
2. The lift of the building shall be designed at high speed "Fire Lift" and conspicuously indicated marked in the plan.
3. One of the lift cars of the building shall be large enough to accommodate standard Ambulance Stretcher and Medical Attendants.
4. The Electric power shall be from separate supply mains in the building and cables run with in the lift shafts, light and fans in the lift cars shall be operated from 24 volts, supply on emergency in case of failure of normal power supply lift shall automatically trip over alternate power supply.
5. Arrangement shall be provided for extraction of smoke in all the lift shaft by incorporation smoke venting system designed to permit 30 Air changes per hour in case of Fire and shall be of such design as to operate on actuation of Sprinkler or Fire Alarm. In case of failure of normal electric supply. It shall automatically trip to alternate supply.
6. Exit doors of the lift lobby shall be through a self- closing smoke stop door of 1hour fire resistance
7. The speed of the fire lifts in the building shall be such that it can reach the top from the ground floor within 1 minute in visual indications of floor numbers shall incorporated in the lift cars.
8. All other requirements shall conform the I.S. specification including the communication facility in the lift cars connecting to the Fire Control Room of the building.
9. All Lifts shall be pressurized a positive pressure of 25 to 30 Pa. shall be maintained inside the lift wall and lobby. The pressurization shall be maintained round the clock.

E. REFUGE AREA:

1. The Refuge area on calculating the area at the rate of 0.3 m²/ person on the basis of floors area shall be provided on the external wall as cantilever projection or any other suitable means as shown for the plan drawing.
2. The refuge area shall be of Fire resisting construction and protected with self closing F.C.D. at the entrance from the corridor or the staircase lobbies.

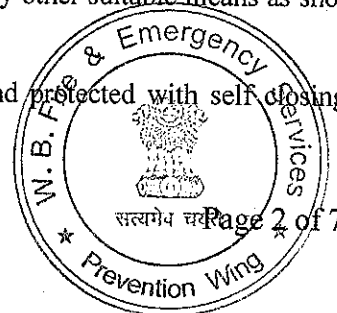

3. The position of refuge Areas shall be such that they are negotiable by the Fire service Ladder from the ground floor.

F. FIRE FIGHTING WATER:

1. Water exclusively for Fire Fighting operation shall be ensure minimum 3,00,000 lts. all the time.
2. The Fire water reservoir shall have overflow arrangement with the domestic reservoir to avert stagnancy of water.
3. Provision of necessary manhole shall be made on the top of the reservoir as per specification.
4. Provision of replenishment at the rate of atleast 2000lts./min. from two separate sources of water supplies shall be made.
5. The deep tube wells for the replenishment of the reservoir shall be incorporated with the auto starting facility with the actuation of auto detection and suppression arrangement of the premises and shall also be connected with dual power supply units.
6. Provision of placing Fire Appliances on the underground water reservoir shall have to be made to draw water in case of emergency.
7. Overhead water reservoir of each block should be 20,000 Ltrs capacity.

G. WATER LAYOUT SYSTEM :

a. Ringmain Hydrant System:


- i. 150 mm dia Ringmain water layout arrangement covering the entire premises of the project with provision of pillar type yard hydrants with door hose boxes, containing 2 lengths of 63mm delivery hose and short branch pipe shall be provided at all the strategic location and surrounding the buildings conforming I.S. 3844-1989 (upto date amendment).
- ii. The system shall be so designed that shall always be kept charged with water under pressure and capable to discharge min. 2850 ltrs./min. at the pressure 3.5kg/sq.cm. at any point.

b. Wet Riser & Hose Reels System:-

- i. The building shall be provided with Wet Riser and Hose Reel unit with provision of outlets in each floor at the staircases landings/half landings as per suitable at the rate of one such unit of Wet Riser and Hose Reel per 1000sq.m. of floor area.
- iii. The Wet Riser installation shall be made in reference to the height of the office building in stage wise distributions.

1st Stage Ground floor to 10th floor 200mm dia twin Hydrant outlet.
2nd Stage 11th Floor to Top Floor 150mm. Dia. Twin Hydrant outlet.

- iii **Hose Reel Unit:-** Provision of hose reel units on swiveling drum in conjunction with wet riser near each landing valves shall be made at each floor level of the office building.
- iv All other requirements of the water base Fire Protection System shall be made as per I.S. Specification 3844-1989 (with upto date amendment).

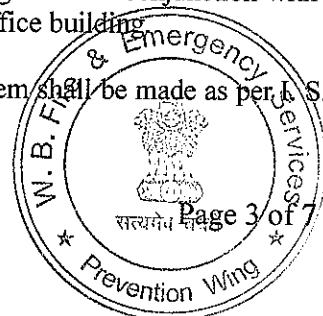

c. Automatic Sprinkler Installation :

- i. All floors and Rooms of the building including Basement shall be suitable protected by automatic Sprinkler installation conforming the grade as per I.S. Specification.
- ii. The Sprinkler arrangement shall be laidout in Zonewise
Zone 1-Ground to 7th floor.
Zone-2 8th to 14th floor
Zone3- 15th floor to Top floor.

d. Water Projector Protection.

The Electrical installations viz. transformer, HT,LT switch gear etc. shall be protected by high or medium velocity Water Projector System as per suitability.

H. FIRE PUMP :

1. 2850 Lts. per min. giving a pressure not less than 0.3N/m² at the top the pump provided will be of multi stage type with suction and delivery size not less than 15cm. dia with low level riser upto six storied and high level riser delivery for upper floors. A set ball valves to supply the tank with at least 2850 ltrs. Per min. from the fire pump. Alternatively a multistage, multioutlet pump may be installed.
2. A standby Pump of equal capacity shall be provided on alternative source of supply. Provision of Jockey pump have to be made to keep up the water based system under pressurized condition at all the time.

I. ELECTRICAL DISTRIBUTION SYSTEM:

1. Electrical distribution system of all the building shall be made in the form of concealed wiring or in heavy gauge M.S. conducted continuously bonded to earth cables shall be I.S. marked and preferably be of F.R.L.S. categories.
2. Electrical distribution System shall conform all the requirements laid down in I.S. 1646-1982.
3. For every 230V wiring above false ceiling 660 grade insulated cable shall be used Transformer Switch Gear H.T.,L.T. and other electrical rooms shall be at the ground floor level the other electric rooms shall be at least 4hrs. fire resisting capacity adequate ventilation arrangement shall have to be made in all the rooms, Dry and explosion proof type transformer shall be installed.
4. All electrical installation viz. Transformers, Switch Gears, L.T., HT rooms shall be protected with both auto detection and suppression systems as per suitability.

J. AUTO DETECTION AND ALARM SYSTEM :


1. Auto Fire Alarm System which analogue addressable smoke heat detectors as per suitability shall be installed in all floor area of the building except Car parking area.
2. Addressable analogue manual call boxes incorporating with sounders shall be installed in all the floor area of the building in such a manner that maximum travel distance shall not be more than 22.5m in order to reach any of the call point.
3. Both way Public address system linked between all floors and Control Room shall have to be established.



4. All the installation shall also satisfy the I.S. Specification 2189 as amended and the code of practice as laid down in N.B.C. pt. IV.

K. AIR CONDITIONING SYSTEM :

1. The A.H.U. shall be separated for each floor with the system Air Ducts for individual floors.
2. Arrangement shall be made for isolation at the strategic locations by incorporating auto dampers in the Air Conditioning system.
3. The system of auto shut down of A.H.U. shall be incorporated with the auto detection and alarm system.
4. The air handling units room shall not be used for storage of any combustible materials.
5. Escape route like staircase, common corridors, lift lobby etc. shall not be used as return air passage.
6. Wherever the ducts pass through Fire wall of floors, the opening surrounding the ducts shall be sealed with Fire resisting materials such as asbestos rope vermiculite concrete etc.
7. The metallic ducts shall be used even for the return air instead of space above the false ceiling.
8. The materials used for insulating the duct system (inside or outside) shall be of non- combustible materials glass wool shall not be wrapped or secured by any materials of combustible nature.
9. Area more than 750 sq. m. on individual floor shall be segregated by a Fire wall and automatic fire damper for isolation shall be provided.
10. Air duct services main floor area, corridors etc. shall not pass through the staircase enclosures.
11. The air handling units shall be separation for each floor, and air ducts for every floor shall be separated and in no way interconnected with the ducting of any other floor.
12. If the air handling units serve more than 1 floor, the recommendation given above shall be complied with in addition to the conditions given below:-
 - a. Proper arrangements by way of automatic Fire dampers working on fuseable link for isolating all ducting at every floor from the main riser shall be made.
 - b. When the automatic Fire alarm operates the respective air handling units of the air conditioning system shall automatically switched off.
13. The vertical shaft for treated fresh air shall be of masonry construction.
14. The air filters for air handling units shall be of non combustible materials.
15. The air handling units room shall not be used for storage of any combustible materials.
16. Inspection panel shall be provided in the main trunking to facilitate the cleaning of ducts of accumulated dust and to obtain access for maintenance of fire dampers.
17. No combustible materials shall be fixed nearer than 15cm to any duct unless such duct properly enclosed and protected with non combustible materials (glass wool or Spun wool with neoprene facing enclosed and wrapped with aluminium sheeting) at least 3.2m thick. And which would not readily conduct heat.

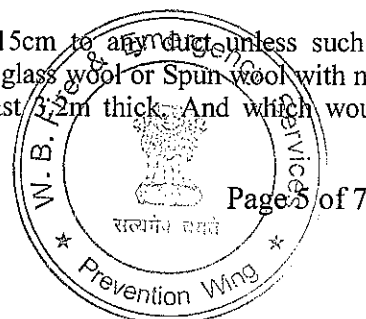

L. FIRST AID FIRE FIGHTING SYSTEM :


1. First Aid Fire fighting arrangement in the style of placing suitable type of portable Fire Extinguishers- I.S.I. mark, Fire Buckets etc. in all floors and venerable locations of the premises shall be made in accordance with I.S. 2190-1992.
2. Special rescue equipment like Smoke Hood, self contained B.A. set portable lights at least two pairs (4sets) shall be made available in the main fire Control Room of the premises.

M. GENERAL RECOMMENDATIONS :

1. Fire License shall have to be obtained for proposed storing and processing with L.P.G. and other highly combustible articles.
2. Floor number, directional sign, showing the nearest exit Refuge Area and Fire Points etc. shall have photo luminescent signals at each floor of all blocks of building including shall be made available conforming the relevant I.S. Specification.
3. If diesel oil is stored beyond the specified quantity license shall be accorded from the appropriate authority.
4. The occupants, employees and security staff shall be conversant with installed First aid Fire Fighting equipments of the building and to operate in the event of Fire and Testing.
5. Arrangement shall be made for regular checking, testing and proper maintenance of all the Fire Safety installation and equipments and means of escapes installed in the building to keep them in perfectly good working conditions at all times by authorized competent agency is this regard.
6. A crew of trained Fireman under the experienced Officer shall be maintained round the clock for safety of the building.
7. Mock Fire practice and evacuation drill shall be performed periodically with participation of all occupants of building.
8. **Submit the structural drawing of the culvert alongwith its calculations to be vetted from civil engineering department of any reputed concern like IIT Kharagpur to ascertain that the existing culvert is capable to withstand the load of specialized fire vehicle of about 45M.T.**
9. Multi Stage, Multi outlet pump shall be provided.
10. Duct Detector to be installed in all ducts as per I.S.
11. Each year a certificate is to be obtained from the Director General, West Bengal Fire & Emergency Services certifying about the satisfactory services, performance of all the Life and Fire Safety arrangements and installation of the building.

On compliance of all the above Fire safety recommendations, the Director General, West Bengal Fire & Emergency Services shall be approached for necessary inspection and testing of the installation, Fire Safety Certificate in favor of the occupancy shall be issued on being satisfied with the tests and performances of safety aspects of installation of the building.

N.B.: Any deviation and changes the nature of use of the building in respect of the approved plan drawing, without obtaining prior permission from this office, this Fire & Life Safety Recommendation will be treated as cancelled.

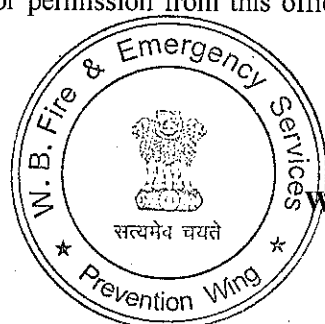

**DIRECTOR IN CHARGE
FIRE PREVENTION WING
WEST BENGAL FIRE & EMERGENCY SERVICES**